


# 3516B

## GENERATOR SET

Electronic  
Control  
System

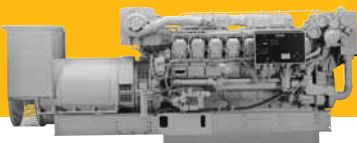

### RATINGS AND FUEL CONSUMPTION

#### Generator Set

	ekW @ .8pf	kVA	rpm	U.S. g/h	g/bkW-hr	EPA - IMO - EU
<b>60 Hertz</b>	1285	1606	1200	80.5	208.6	NC - I - NC
<b>60 Hertz</b>	1825	2281	1800	125.3	198.8	NC - I - NC
<b>50 Hertz</b>	1180	1475	1000	80.6	203.1	NC - I - NC
<b>50 Hertz</b>	1460	1825	1500	102.2	203.4	NC - I - NC
<b>50 Hertz</b>	1600	2000	1500	111.9	208.4	NC - II - NC

	LE	LG	H	WE
<b>min.</b>	125.2 in/3181 mm	199.8 in/5076 mm	80.8 in/2053 mm	67.1 in/1703 mm
<b>max.</b>	125.2 in/3181 mm	220.9 in/5611 mm	82.7 in/2100 mm	84.4 in/2144 mm

### Vee 16, 4-Stroke-Cycle Diesel

<b>Aspiration</b>	TTA	
<b>Bore x Stroke</b>	6.7 X 7.5 in	170 x 190 mm
<b>Displacement</b>	4210 cu in	69.0 liter
<b>Rotation (from flywheel end)</b>	Counterclockwise	
<b>Generator set weight (approx)</b>	25,030-29,845 lb	11 354-13 538 kg